










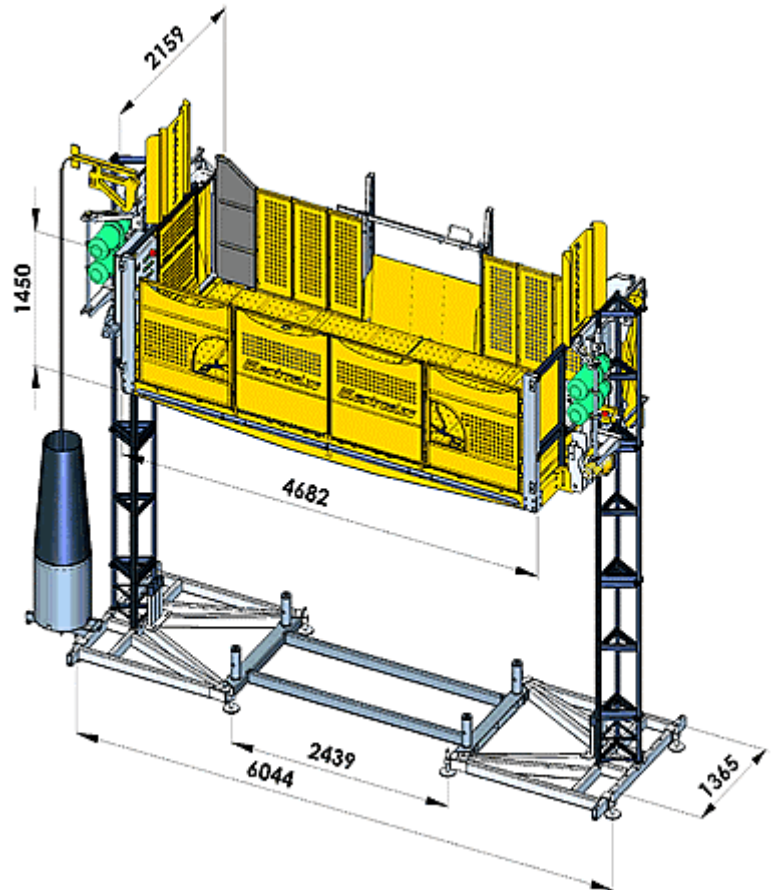


EHPM 2500 / 25 运输平台

EHPM2500 - 25	 2500 Kg
	+ 2400 Kg 
	+ 2300 Kg 
	+ 2200 Kg 
	+ 2100 Kg 
	+ 2000 Kg 



EHPM 2500 / 25 技术资料	
最大有效载荷能力	2500 kg
提升速度	12 m / min
最大束紧高度	120 m
平台尺寸	3961 x 2000 mm
输入功率范围	380 / 415 V, 50 / 60 Hz, 3 Ph
保护开关	32 A
发动机功率	4 x 3 kW
起动电流	220 A
要求（建议）的最低线路功率	20 kW

ARISTARCHUS Ltd
阿里斯塔克斯 有限公司

邮箱: info@aristarchus.eu